


Generator Load Sensor

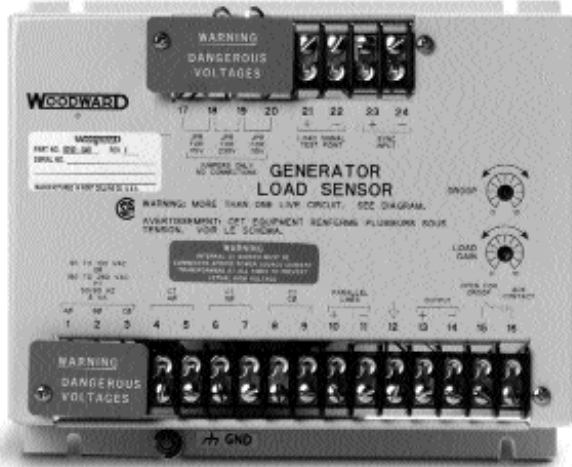


- Adds gen set load sharing capability to Woodward speed controls
- CSA Certified
- Allows automatic speed/phase matching
- Allows automatic generator loading with speed controls

APPLICATIONS

The Generator Load Sensor is used to provide droop and isochronous load sharing for generator applications which use Woodward 701, EPG, and 2301A speed controls. It has an SPM-A synchronizer input and shares load with all Woodward load sensors and load sharing and speed controls.

DESCRIPTION

The Generator Load Sensor receives input from current transformers (CTs) and potential transformers (PTs), to calculate power from the generator, assuming constant voltage. It generates an output which biases the speed reference of the speed control. The Generator Load Sensor uses paralleling lines to ensure proportional load sharing when generators are isochronously paralleled.

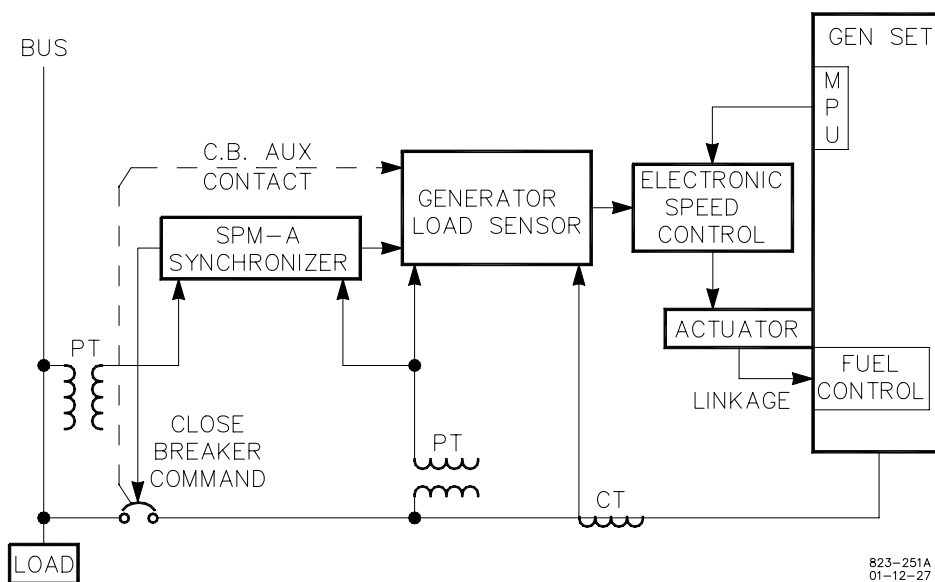

823-251A
01-12-27

System Block Diagram Showing Optional SPM-A Synchronizer

Woodward
 Industrial Controls
 PO Box 1519
 Fort Collins CO, USA
 80522-1519
 1000 East Drake Road
 Fort Collins CO 80525
 Ph: +1 (970) 482-5811
 Fax: +1 (970) 498-3058

Distributors & Service
 Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

Corporate Headquarters
 Rockford IL, USA
 Ph: +1 (815) 877-7441

www.woodward.com

SPECIFICATIONS

Inputs

- Load Sensing Voltage 3-phase PT input, jumper terminal 17 to 18 and 19 to 20 for 95 to 130 Vrms (power consumption 2.5 VA). Jumper terminal 18 to 19 for 190 to 260 Vrms (power consumption 5 VA).
- Load Sensing Current 3-phase CT input, 5 A at full load. Internal instrument CTs produce essentially 0 burden.
- Optional Inputs SPM-A Synchronizer, Process/Import Export Control, Precise Frequency Control, Automatic Generator Load Control.
- Drop Selected by opening terminals 15 to 16.

Performance


Load Sharing Accuracy ±5% of rated load with speed settings matched

Physical Characteristics

- Weight 0.9 kg (2.0 lb)
- Mounting Any convenient location except on engine, any attitude
- Ambient Temperature Range -40 to +75 °C (-40 to +167 °F)

Adjustments

- Load Gain Calibrates Generator Load Sensor to CT ratio
- Drop Adjustable from 0 to 10% with CT currents of 5 A

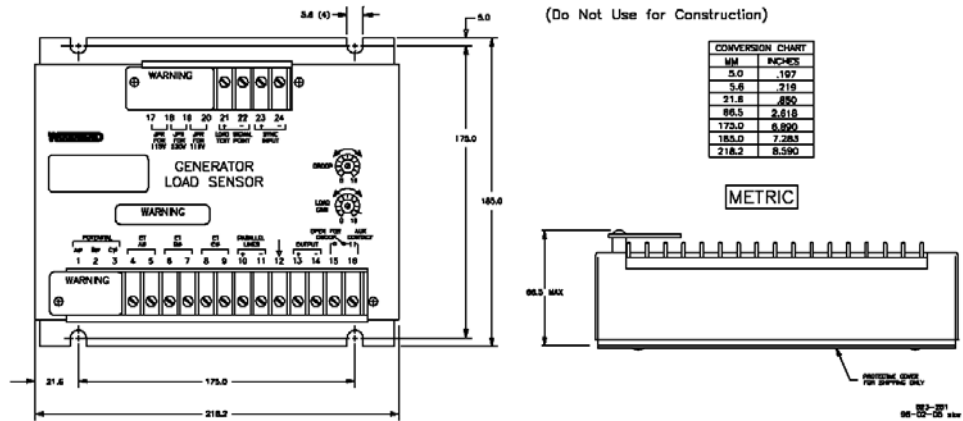

Generator Load Sensor Outline Drawing

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

© Woodward Governor Company, 1983
 All Rights Reserved

For more information contact: